


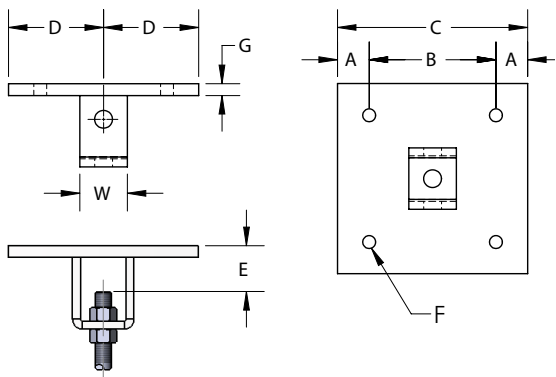

|                           |                                                                                                                |                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Materials/Finishes</b> | Plain Carbon Steel (68B)                                                                                       | Electro-Galvanized (68G) |
|                           | Hot-Dip Galvanized (68HDG)                                                                                     | T-304 Stainless (68SS)   |
|                           | T-316 Stainless (68SX)                                                                                         |                          |
| <b>Service:</b>           | Designed for the attachment of hanger rod to concrete ceilings where vertical adjustment of hanger is desired. |                          |
| <b>Ordering:</b>          | Specify figure number, finish and rod size.                                                                    |                          |
| <b>Notes:</b>             | Hot-Dip Galvanized attachment uses Electro-Galvanized Hardware.                                                |                          |

| ROD SIZE | A | B | C  | D | E     | F     | G   | W     | WGT EACH (lbs) | MAX REC LOAD (lbs) |
|----------|---|---|----|---|-------|-------|-----|-------|----------------|--------------------|
| 3/8      | 1 | 8 | 10 | 5 | 2-1/4 | 9/16  | 3/8 | 2     | 11.60          | 730                |
| 1/2      | 1 | 8 | 10 | 5 | 2-1/8 | 9/16  | 3/8 | 2     | 11.60          | 1350               |
| 5/8      | 1 | 8 | 10 | 5 | 2-1/4 | 9/16  | 1/2 | 2     | 15.20          | 2160               |
| 3/4      | 1 | 8 | 10 | 5 | 2-1/4 | 11/16 | 1/2 | 2-1/2 | 16.10          | 3230               |
| 7/8      | 1 | 8 | 10 | 5 | 3-1/8 | 11/16 | 1/2 | 2-1/2 | 16.70          | 4480               |
| 1        | 2 | 8 | 12 | 6 | 3-1/2 | 13/16 | 3/4 | 3     | 35.00          | 5900               |
| 1-1/8    | 2 | 8 | 12 | 6 | 3-5/8 | 13/16 | 3/4 | 3     | 35.20          | 6230               |
| 1-1/4    | 2 | 8 | 12 | 6 | 3-5/8 | 13/16 | 3/4 | 4     | 40.90          | 9500               |

| PROJECT INFORMATION | APPROVAL STAMP    |
|---------------------|-------------------|
| Project:            | APPROVED AS NOTED |
| Address:            | NOTES:            |
| Contractor:         |                   |
| Engineer:           |                   |
| Date:               |                   |
| APPROVED            |                   |
| NOT APPROVED        |                   |