


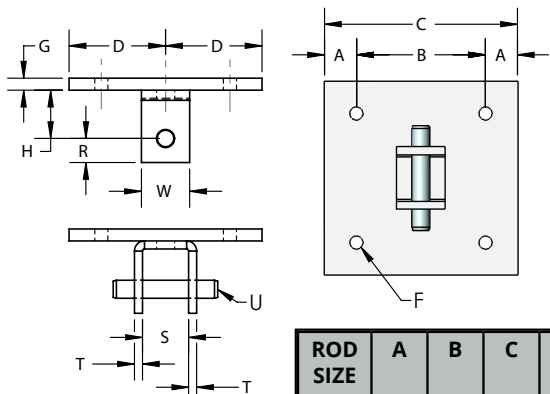

Materials/Finishes:	Plain Carbon Steel (67B)	Electro-Galvanized (67G)
	Hot-Dip Galvanized (67HDG)	T-304 Stainless (67SS)
	T-316 Stainless (67SX)	
Service:	Designed for the attachment to concrete ceilings where flexibility is desired. Normally used in conjunction with FIG. 13 weldless eye nut or FIG. #26W welded eye rod.	
Ordering:	Specify figure number, finish and rod size.	
Notes:	Hot-Dip Galvanized clevis plate uses Electro-Galvanized Hardware.	

ROD SIZE	A	B	C	D	F	G	H	R	S	T	U	W	WGT EACH (lbs)	MAX REC LOAD (lbs)
3/8	1	8	10	5	9/16	3/8	2	7/8	1-1/2	1/4	1/2	2	11.90	730
1/2	1	8	10	5	9/16	3/8	2	7/8	1-1/2	1/4	5/8	2	12.00	1350
5/8	1	8	10	5	9/16	1/2	2	7/8	1-1/2	1/4	3/4	2	15.80	2160
3/4	1	8	10	5	11/16	1/2	2	1-1/8	1-3/4	3/8	7/8	2-1/2	17.00	3230
7/8	1	8	10	5	11/16	1/2	3	1-1/4	2-1/4	3/8	1	2-1/2	18.10	4480
1	2	8	12	6	13/16	3/4	3	1-1/2	2-3/4	1/2	1-1/8	3	36.90	5900
1-1/8	2	8	12	6	15/16	3/4	3	1-3/4	2-3/4	5/8	1-3/8	3	37.90	6230
1-1/4	2	8	12	6	15/16	3/4	3	2	3	5/8	1-3/8	4	43.00	9500
1-1/2	2	8	12	6	1-1/8	1	4	2-1/2	3-1/2	3/4	1-5/8	5	60.00	13800

PROJECT INFORMATION	APPROVAL STAMP
Project:	APPROVED AS NOTED
Address:	NOTES:
Contractor:	
Engineer:	
Date:	
APPROVED	
NOT APPROVED	