


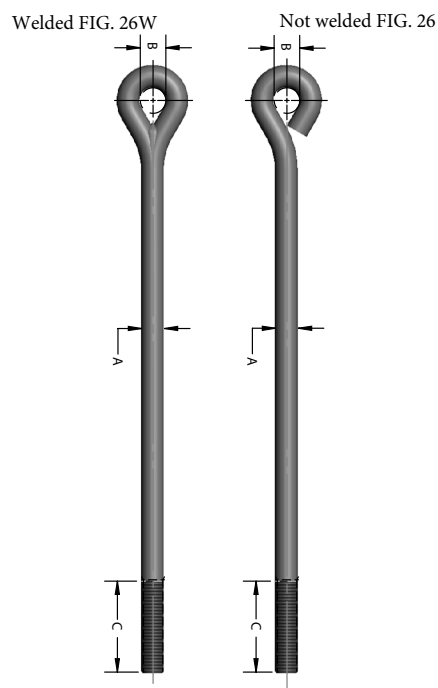

Materials/Finishes	Plain Carbon Steel (26B)	Electro-Galvanized (26G)
	Hot-Dip Galvanized (26HDG)	T-304 Stainless Steel (26SS)
	T-316 Stainless Steel (26SX)	
Variants:	Plain Carbon Steel, Welded (26WB)	Electro-Galvanized, Welded (26WG)
	Hot-Dip Galvanized, Welded (26WHDG)	T-304 Stainless Steel, Welded (26WSS)
	T-316 Stainless Steel, Welded (26WSX)	
Service:	Designed for for use in hanger assemblies and supports.	
Ordering:	Specify figure number, finish and rod size.	
Notes:	Other lengths, rod diameters and thread lengths available upon request.	

ROD SIZE A	B	C	MAX REC LOAD (lbs)		
			FIG# 26 (NOT WELDED) 650°F	FIG# 26W (WELDED)	
				650°F	750°F
3/8-16	0.500	2.500	240	610	540
1/2-13	0.625	2.500	440	1130	1010
5/8-11	0.750	2.500	705	1810	1610
3/4-10	0.875	3.000	1050	2710	2420
7/8-9	1.000	3.500	1470	3770	3360
1-8	1.125	4.000	1940	4960	4420
1-1/8" - 7	1.250	4.500	2430	6230	5560
1-1/4" - 7	1.375	5.000	3120	8000	7140
1-1/2" - 6	1.625	6.000	4650	11630	10370

PROJECT INFORMATION	APPROVAL STAMP
Project:	APPROVED AS NOTED
Address:	NOTES:
Contractor:	
Engineer:	
Date:	
APPROVED	
NOT APPROVED	